


PRODUCT FEATURES

NATUS is a double flap smoke vent suitable for the removal of large quantities of warm air and / or smoke from a building within a short period of time, daily ventilation and natural lighting. Suitable for utilization on various curbs and domes.

The vents are manufactured according to ISO 9001 quality control standards and comply with the European requirements for NSHE according to EN 12101-2.

Reliability tests with 10,000 opening and closing cycles have proven its robust and functional design. The vents are formed from high quality corrosion resistant aluminium and steel to ensure low maintenance requirements and watertightness. Available on large dimensions, up to 2300 x 3000 mm (width x length).

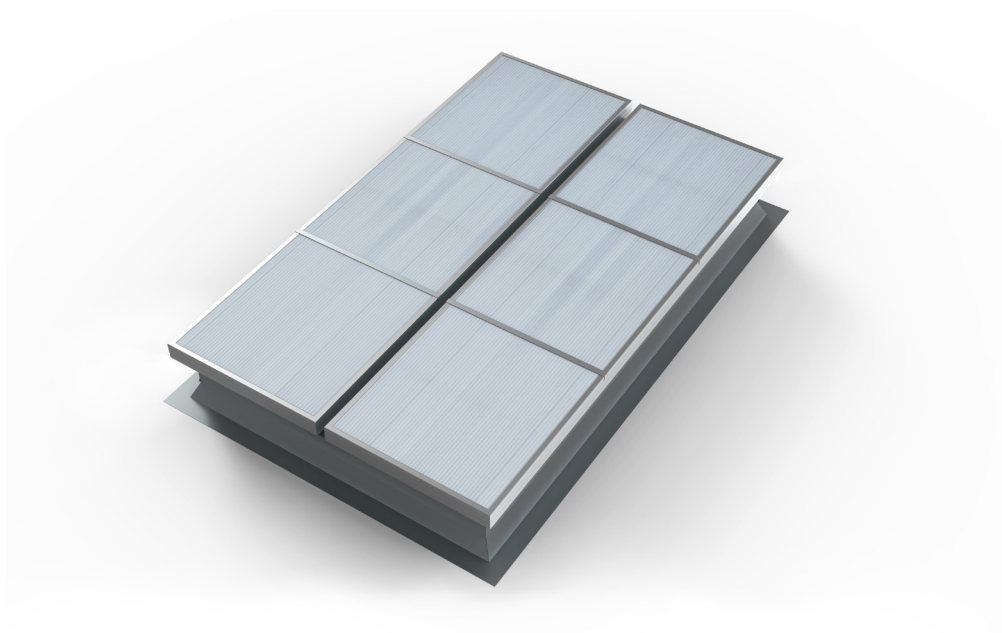



natus

TYPICAL APPLICATIONS

May be installed either onto roofs or into daylighting systems. Particularly suitable for warehouses, logistics centers, production environments, and industries.

- Flat roofs
- Skylights
- Sandwich panel roofs

MATERIALS

Aluminum; AlMg3 tempered, seawater resistant and corrosion resistant, and extruded aluminum profiles for the frames. Aluminum is supplied untreated, as standard. Free of silicones. Conical upstands in galvanized steel integrated in the vent.

DIMENSIONS

Roof opening width: 1600 - 2300 mm.
Roof opening length: 1600 - 3000 mm.

OPENING ANGLE

90°

CONTROLS NATURAL VENTILATION


P2: double pipe compressed air operation

CONTROLS FIRE VENTILATION

P2: double pipe compressed air operation.

FLAPS


- AL** Single aluminium.
PC16 PC16 Polycarbonate 16mm, clear or opal.
PC25 Polycarbonate 25mm, clear or opal.



AL



PC16



PC25

FLANGES

- S3** Flange for roofs, 45° bended.
S4 Flange for roofs and facades.
S5 Flange for upstand, 90° bended downwards.



S3



S4



S5

WEIGHT

Depends on dimensions and type of infill.

OPTIONS

Powder-coated design (any RAL colour)
 Anti-fall grid 1200 J.
 Thermal insulation of the upstands from 20 to 50mm.
 Upstands with anti-oxidant and waterproof welding.


REGULATIONS

Tested in accordance with the Directive 2014/34/EU, NATUS is ATEX certified equipment.
 The system has been tested and is certified in accordance with EN 12101-2.


Reliability – Re 1000
 Ventilation – Yes, 10.000 cycles (total opening)
 Snow Load – SL 1200
 Low Temperature – T(-15°C)
 Wind Load – WL 1500
 Fire Resistance – B300

ROOF OPENING DIMENSIONS **(Aerodynamic Area [m²])**


WIDTH (mm)	LENGHT (mm)							
	1600	1800	2000	2200	2400	2600	2800	3000
1600	1,64	1,84	2,05	2,25	2,50	2,70	2,91	3,12
1800	1,87	2,11	2,34	2,57	2,81	3,04	3,33	3,56
2000	2,08	2,34	2,60	2,86	3,17	3,43	3,70	3,96
2200	2,32	2,61	2,90	3,19	3,48	3,78	4,13	4,42
2300	2,43	2,73	3,04	3,34	3,64	4,01	4,31	4,62

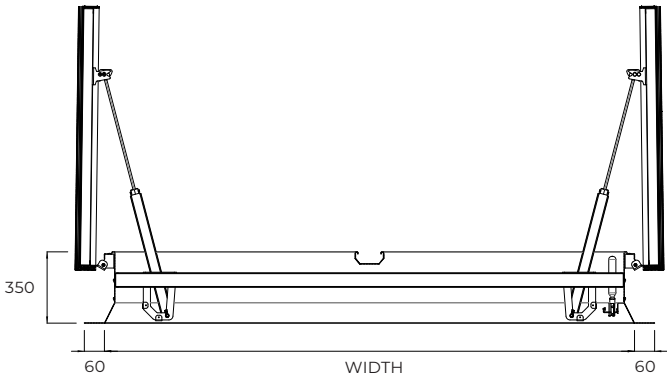

SECTION A-A

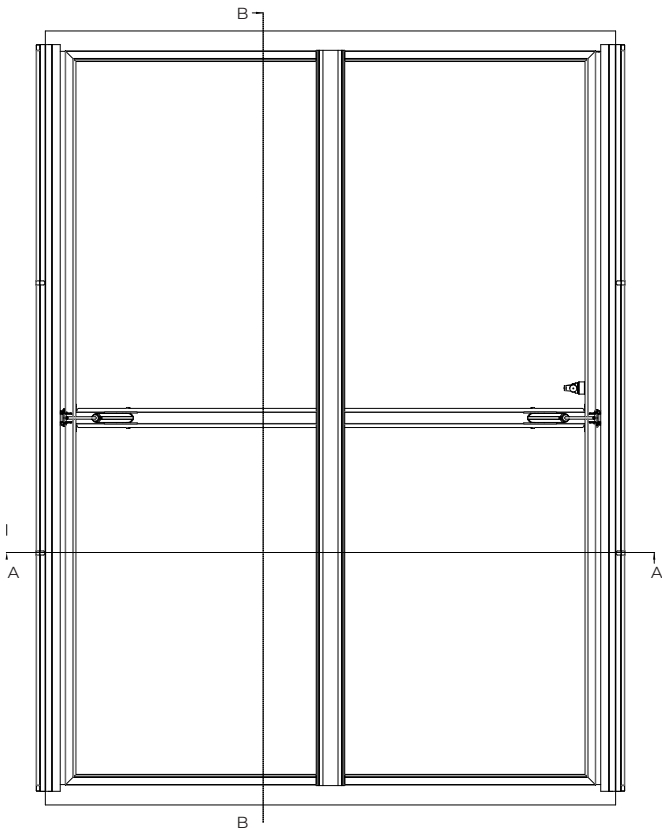

NATUS CONICAL UPSTAND
OPEN

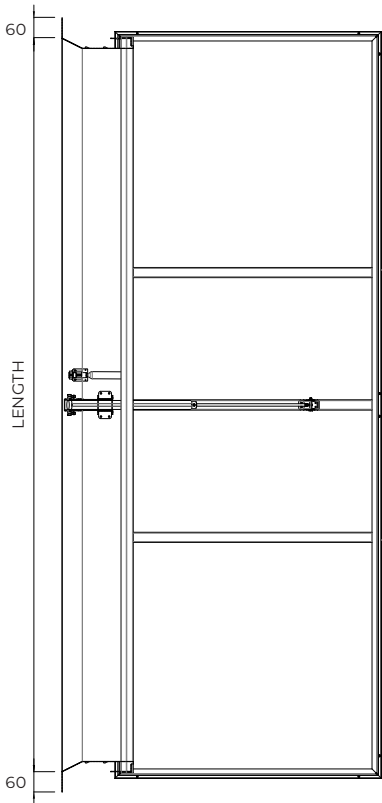

SECTION B-B