

PRODUCT FEATURES

TRILIGHT is a certified and CE compliant façade system.







trilight

	PC216	ARCOPLUS 625	PC 540-3	PC 540-7	PC 560-11
COVERED WIDTH (mm)	200	667	500	500	500
DIMENSIONS (mm)	210 X 16	683 X 20	525 X 40	252 X 40	525 X 60
U-VALUE (W/m ² K)	2,7	1,7	1,7	1,1	0,80/0,82
SOUND ABSORPTION APPROX. (dB)DIN52210	16	16	21	21	22
COLOR RANGE (STANDARD)	CRISTALL, BRONZE, OPAL		CRISTALL, OPAL		
LIGHT TRANSMISSION (%)	65-35	60-35	58-30	56-30	54-28
FIRE RATING (EN ISO 1350-1-1)			B-S1, D0		
CE CLASSIFICATION	+	+	+	+	+


**WALL GLAZING INTO
OPENING NOT THERMALLY
BROKEN 40 mm PANELS**

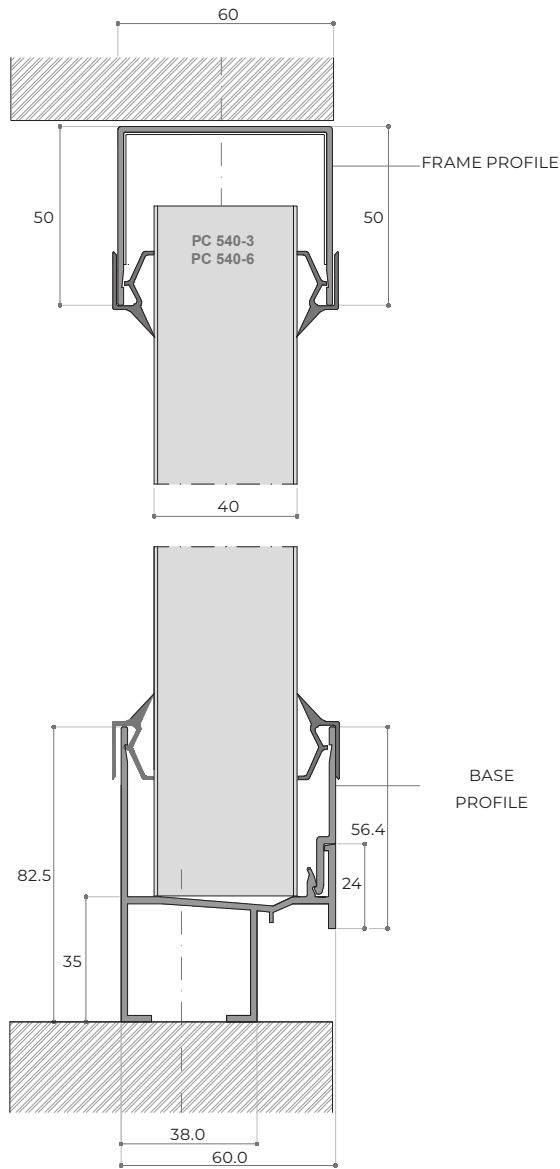


**WALL GLAZING FACE MOUNTED
40 mm PANELS**

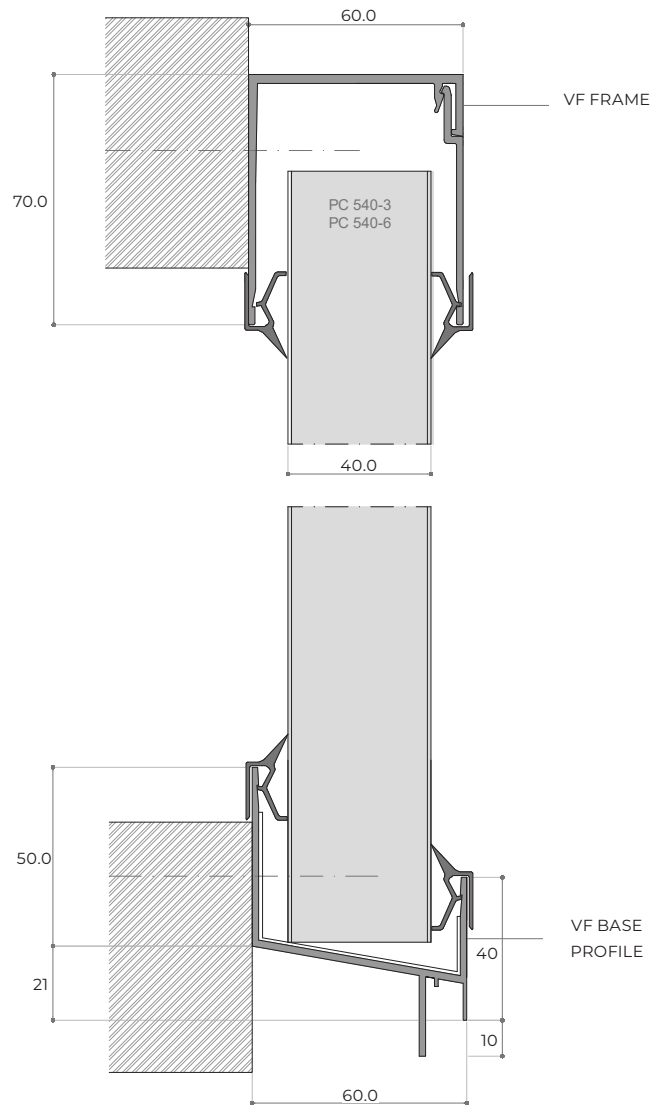


PC 216

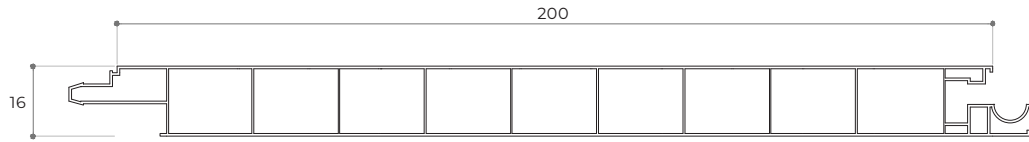


PC 560-11

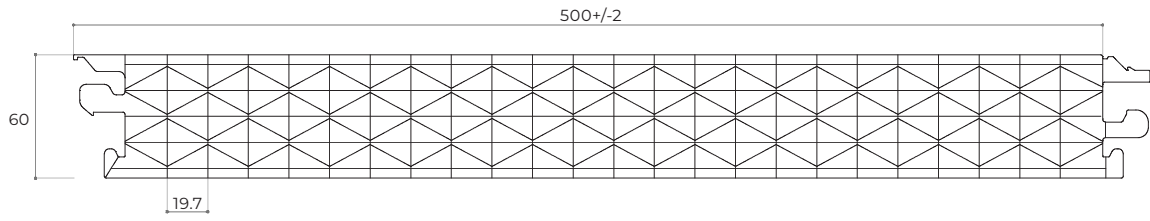


PC 540-3

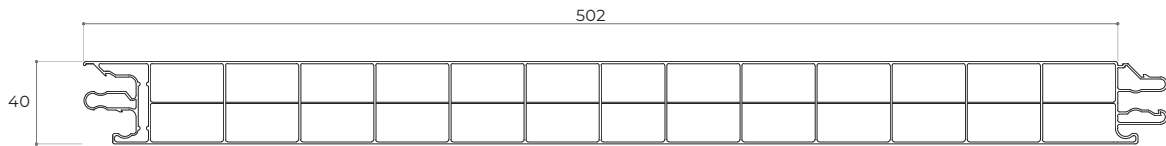


PC 540-7

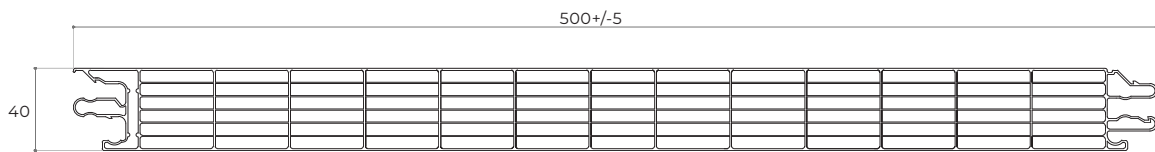


ARCOPLUS 625




**WALL GLAZING THERMALLY
BROKEN 60 mm PANELS**

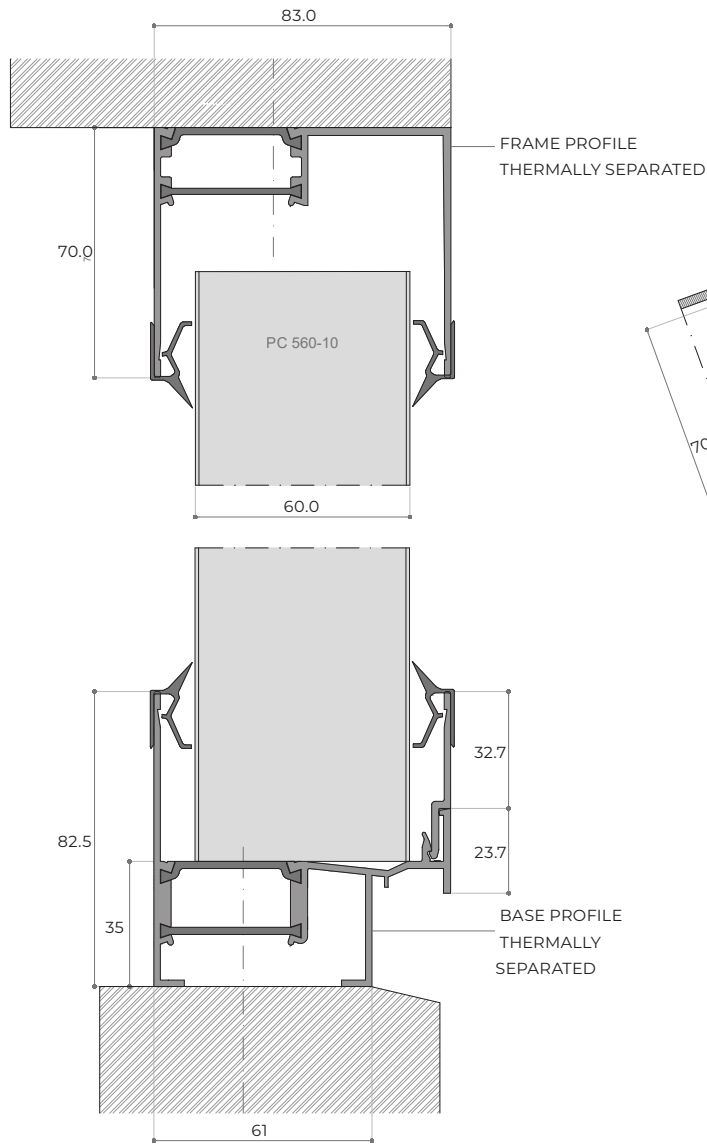

ROOF GLAZING > 25°SLOPE

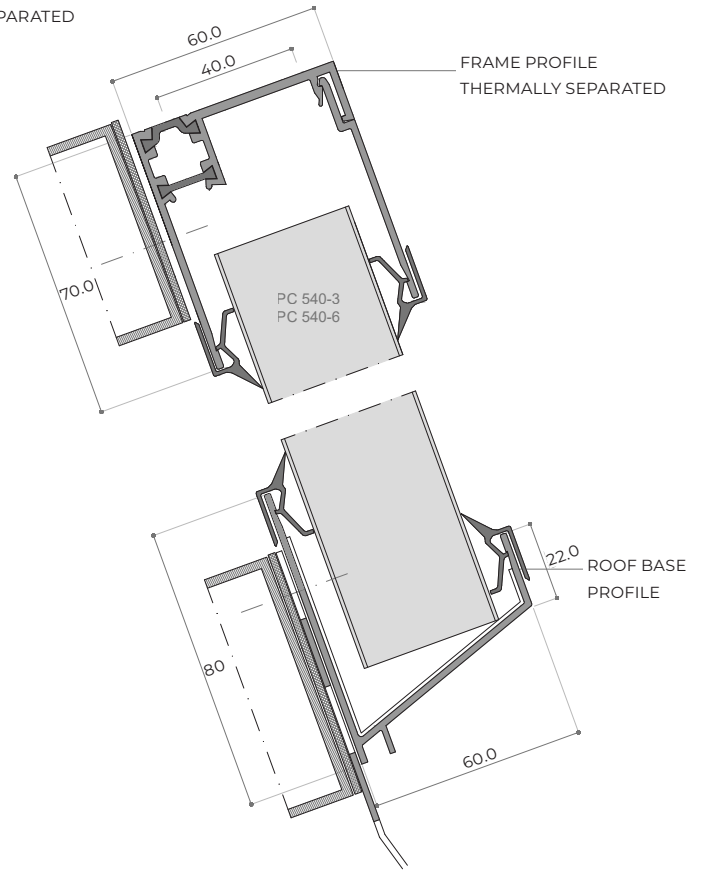

**ALUMINIUM H-BAR
40 mm PANELS**

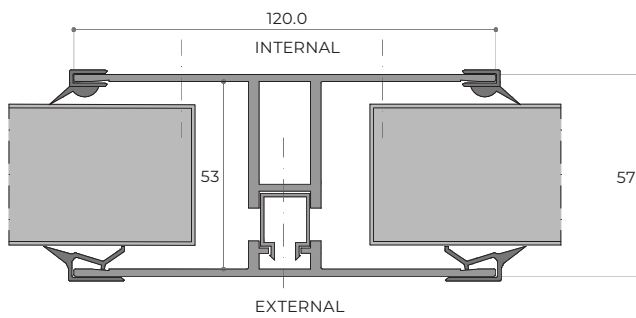

ALUMINIUM PURLIN CLIP

